



DTH HAMMER **PMK 300**

PMK 300

APPLICATIONS

- BLAST HOLE
- QUARRY AND MINING
- CONSTRUCTION
- HORIZONTAL

A new generation of DTH hammers.

Why buy a OCMA DRILLTECH HAMMER?

Advantage:

A high performance DTH hammer for all rock conditions. Superior Designs, built for drilling 90 mm - 100 mm (3 1/2" - 4") dia. holes and operates at an optimum air pressure between 10.5 - 24 bar (150 - 350 psi).

DTH HAMMER PMK 300

PMK 300




HAMMER SPECIFICATIONS


WEIGHT	20 Kg	PSI	BAR	CFM	M³/min
LENGTH	833 mm	150	10,3	95	2,6
OUTSIDE DIAM. CYLINDER	78 mm	200	13,8	150	4,3
MAX WORKING PRESSURE	24 BAR	250	17,2	210	5,9
THREAD	2" 3/8 API REG	300	20,7	280	7,8
		350	24,0	325	9,2

AIR CONSUMPTION

BIT SHANK - I.R. DHD 3.5



ITEM	DESCRIPTION	PART N°
1	BACKHEAD	OC-01-03
2	O-RING	OC-02-03
3	N.R. VALVE	OC-03-03
4	N.R.V. SPRING	OC-04-03
5	AIR DISTRIBUTOR	OC-05-03
6	SPACER	OC-06-03
7	SPRING B.	OC-07-03
8	O-RING	OC-08-03
9	CONTROL TUBE	OC-09-03
10	SEGER	OC-10-03
11	PISTON	OC-11-03
12	RETAINING RING	OC-12-03
13	BIT RETAINING RING	OC-13-03
14	CHUCK	OC-14-03
15	CYLINDER	OC-15-03

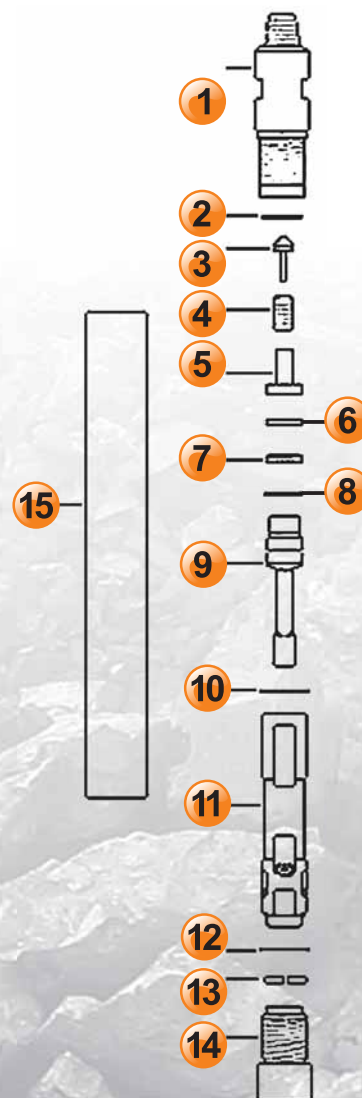

OCMA
DRILLTECH

OCMA s.r.l. - Zona Artigianale P.I.P. Lotto D/8
70056 Molfetta (BA) - ITALY
Tel. +39.080.395.50.30 | Fax +39.080.395.14.98



www.ocmasrl.com | e-mail: info@ocmasrl.com