



R




The new DTH HAMMERS Generation






AIR CONSUMPTION / OPERATING PRESSURE



TECHNICAL SPECIFICATIONS

| Outside Diameter | mm | 145 |
|------------------|------|------------|
| Outside Diameter | Inch | 5.7″ |
| Hammer Length | mm | 1046 |
| | Inch | 41.18" |
| Wrench Flat | mm | 114 |
| | Inch | 4.48" |
| Bit Size Range | mm | 159 ÷ 203 |
| | Inch | 6.25" ÷ 8" |
| Hammer Weight | Kg | 96 |
| | Lbs | 211 |
| | | |

HAMMER CODE: OCGT60HM

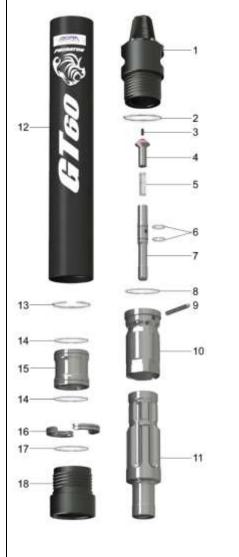

| OCMA GT60 – PART LIST | | | |
|--|--------------------|------------|--|
| Item | Description | Part No. | |
| 1 | Backhead | OCGT60M-01 | |
| 2 | O-Ring | OCGT60M-02 | |
| | Choke Blank | | |
| 3 | Choke 3 mm (0.12") | OCGT60M-03 | |
| | Choke 5 mm (0.19") | | |
| 4 | Check Valve | OCGT60M-04 | |
| 5 | Valve Spring | OCGT60M-05 | |
| 6 | O-Ring | OCGT60M-06 | |
| 7 | Control Tube | OCGT60M-07 | |
| 8 | O-Ring | OCGT60M-08 | |
| 9 | Pin | OCGT60M-09 | |
| 10 | Inner Cylinder | OCGT60M-10 | |
| 11 | Piston | OCGT60M-11 | |
| 12 | Cylinder | OCGT60M-12 | |
| 13 | Retaining Ring | OCGT60M-13 | |
| 14 | O-Ring | OCGT60M-14 | |
| 15 | Guide Bush | OCGT60M-15 | |
| 16 | Bit Retaining Ring | OCGT60M-16 | |
| 17 | O-Ring | OCGT60M-17 | |
| 18 | Chuck | OCGT60M-18 | |
| Service Kit Part No.: OCGT60SK1M Drill Bit Shank: M60 | | | |
| 230 12 Spline M60 | | | |

©OCMA DrillTech 2019 – All Rights Reserved – Document Subject to alterations without prior notice.



OCMA s.r.l. Z.l. Lotto D/8 - 70056 Molfetta (BA) – ITALY Tel. +39(0)803955030 - +39(0)803951498 www.ocmasrl.com - info@ocmasrl.com

