



DTH HAMMER PMK 1200

PMK 1200HD

APPLICATIONS

- WATER WELL
- WATER WELL CASING
- SHALLOW OIL & GAS
- CONSTRUCTION
- EXPLORATION

A new generation of DTH hammers.

Why buy a OCMA DRILLTECH HAMMER?

Advantage:

A high performance DTH hammer for all rock conditions and used in almost any drilling applications is suitable for a wide range of air pressures, 10.5 - 24 (150 - 350 psi).

Superior Designs, built for drilling 302 mm - 445 mm (11 7/8" - 17 1/2") dia. holes the PMK 1200 is designed to accept Button Bits with shank Ingersoll Rand DHD 112.

DTH HAMMER PMK 1200

PMK 1200HD




HAMMER SPECIFICATIONS


WEIGHT	615 Kg	PSI	BAR	CFM	M³/min
LENGTH	1800 mm	150	10,3	1021	30
OUTSIDE DIAM. CYLINDER	273 mm	200	13,8	1650	47
BORE DIAM.	216 mm	250	17,2	2100	59
PISTON WEIGHT	125 Kg	300	20,7	2550	71
STROKE	127 mm	350	24,0	2900	82

AIR CONSUMPTION

BIT SHANK INGERSOLL DHD 112



ITEM	DESCRIPTION	PART N°
1	BACKHEAD	OC-01-12
2	BREAKOUT WASHER	OC-02-12
3	O-RING	OC-03-12
4	CHECK VALVE	OC-04-12
5	VALVE SPRING	OC-05-12
6	AIR DISTRIBUTOR	OC-06-12
7	SPRING B.	OC-07-12
8	CONTROL TUBE	OC-08-12
9	O-RING	OC-09-12
10	RETAINING RING	OC-10-12
11	PISTON	OC-11-12
12	RETAINING RING	OC-12-12
13	BIT RETAINING RING	OC-13-12
14	O-RING	OC-14-12
15	BREAKOUT WASHER	OC-15-12
16	CYLINDER	OC-16-12
17	CHUCK	OC-17-12
18	GUIDE BUSH	OC-18-12

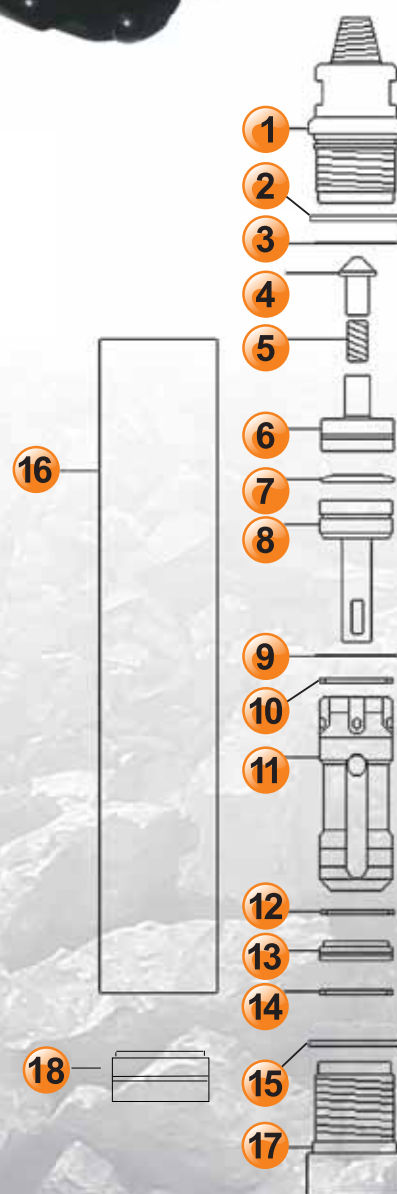

OCMA
DRILLTECH

OCMA s.r.l. Zona Artigianale P.I.P. Lotto D/8
70056 Molfetta (BA) - ITALY
Tel. +39.080.395.50.30 | Fax +39.080.395.14.98



www.ocmasrl.com | e-mail: info@ocmasrl.com