

DTH HAMMER PMK

PMK 600

APPLICATIONS

- WATER WELL
- SHALLOW OIL & GAS
- CONSTRUCTION
- EXPLORATION

A new generation of DTH hammers.

Why buy a OCMA DRILLTECH HAMMER?

Advantage:

Leader for performance in its class.

The PMK 600 is the best solution for drilling contractors and owner-operators seeking maximum productivity and the most fastest DTH hammer in the world.

Heavy duty hammer with 145 mm diameter outer for extended service life in abrasive conditions and is also suitable for water well drilling.

Superior Designs, built for drilling 165 mm - 216 mm (6 1/2" - 8 1/2") dia. holes and operates at an optimum air pressure between 10.5 - 24 bar (150 - 350 psi).

The PMK 600 hammer is designed to accept Button Bits with shank HALCO MACH 60 type

DTH HAMMER PMK 600

AIR CONSUMPTION


РМК 600 НМН



HAMMER SPECIFICATIONS

WEIGHT	106 Kg	PSI	BAR	CFM	M³/min
WEIGHT	100 Ng	F31	DAN	CFIVI	IVI /IIIIII
LENGTH	1252 mm	150	10,3	329	9,31
OUTSIDE DIAM. CYLINDER	145 mm	200	13,8	509	14,4
MAX WORKING PRESSURE	24 BAR	250	17,2	707	20,0
THREAD	3" ½ API REG	300	20,7	930	26,3
		350	24.0	1041	29,5

BIT SHANK - HALCO MACH 60




- /-		
ITEM	DESCRIPTION	PART N°
1	BACKHEAD	OC-01-06
2	CHECK VALVE	OC-02-06
3	VALVE SPRING	OC-03-06
4	AIR DISTRIBUTOR	OC-04-06
5	SPRING B.	OC-05-06
6	CONTROL TUBE	OC-06-06
7	RETAINING RING	OC-07-06
8	PISTON	OC-08-06
9	RETAINING RING	OC-09-06
10	GUIDE BUSH Not for SD6 shank	OC-10-06
11	BIT RETAINING RING	OC-11-06
12	СНИСК	OC-12-06
13	O-RING	OC-13-06
14	O-RING	OC-14-06
15	O-RING	OC-15-06
16	CYLINDER	OC-16-06
THE RESERVE TO STATE OF THE PARTY.		AND TO THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER.

DRILLTECH

OCMA s.r.l. - Zona Artigianale P.I.P. Lotto D/8
70056 Molfetta (BA) - ITALY
Tel. +39.080.395.50.30 | Fax +39.080.395.14.98

www.ocmasrl.com | e-mail: info@ocmasrl.com

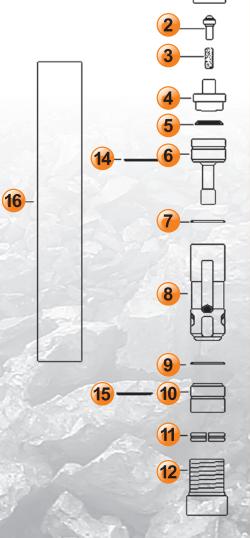

RINA So 9001:2000