



DTH HAMMER PMK

634
700
712

PMK 634 - 700 - 712 STABILIZED

APPLICATIONS

- WATER WELL
- SHALLOW OIL & GAS
- CONSTRUCTION
- EXPLORATION

A new generation of DTH hammers.

Why buy a OCMA DRILLTECH STABILIZED HAMMER?

Advantage:

Superior Performance in Hard, Medium or Soft Rock conditions.

Guarantee of perfect holes thanks to the integrated stabilizer with the cylinder.

Stabilizer cover with 198 bits tungsten carbide for extended service life in abrasive conditions and is also suitable for water well drilling.

Designed to accept Button Bits with a shank Ingersoll Rand DHD 360 and can also be supplied to accept the Mission SD6 and Ingersoll Rand QL60 type of Button Bits.

DTH HAMMER PMK

634
700
712

PMK 634 - 700 - 712 STABILIZED




HAMMER SPECIFICATIONS


WEIGHT	136/150/164 Kg	PSI	150	BAR	10,3	CFM	329	M³/min	9,31
LENGTH	1283 mm								
OUTSIDE DIAM. STABILIZER	165/174/182 mm	200	13,8	509	14,4				
OUTSIDE DIAM. CYLINDER	145 mm	250	17,2	707	20,0				
MAX WORKING PRESSURE	24 BAR	300	20,7	930	26,3				
THREAD	3" ½ API REG	350	24,0	1034	38,0				

AIR CONSUMPTION

BIT SHANK - MISSION SD6 / DHD 360 / QL 60

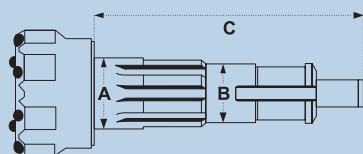

PMK 634	D 171 mm (6" 3/4)
PMK 700	D 180 mm (7")
PMK 712	D 190 mm (7" 1/2)

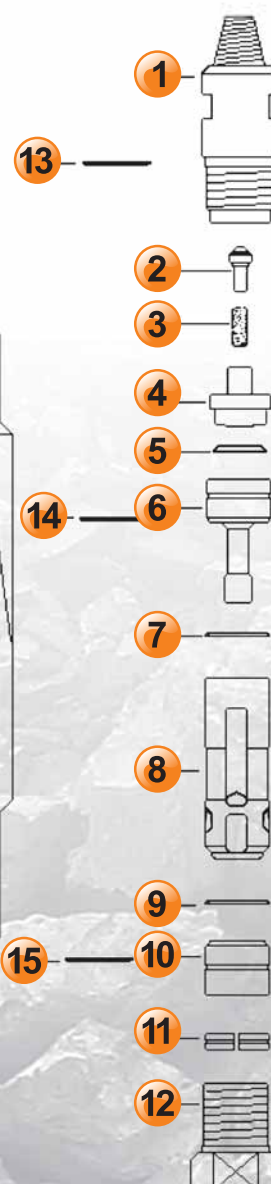

ITEM	DESCRIPTION	PART N°
1	BACKHEAD	OC-01-634
2	CHECK VALVE	OC-02-634
3	VALVE SPRING	OC-03-634
4	AIR DISTRIBUTOR	OC-04-634
5	SPRING B.	OC-05-634
6	CONTROL TUBE	OC-06-634
7	RETAINING RING	OC-07-634
8	PISTON	OC-08-634
9	RETAINING RING	OC-09-634
10	GUIDE BUSH	OC-10-634
11	BIT RETAINING RING	OC-11-634
12	CHUCK	OC-12-634
13	O-RING	OC-13-634
14	O-RING	OC-14-634
15	O-RING	OC-15-634
16	CYLINDER	OC-16-634

OCMA
DRILLTECH

OCMA s.r.l. - Zona Artigianale P.I.P. Lotto D/8
70056 Molfetta (BA) - ITALY
Tel. +39.080.395.50.30 | Fax +39.080.395.14.98



www.ocmasrl.com | e-mail: info@ocmasrl.com